WPmVOL – WPmVOL-SR
WPmVOL-J – WPmVOL-SR-J

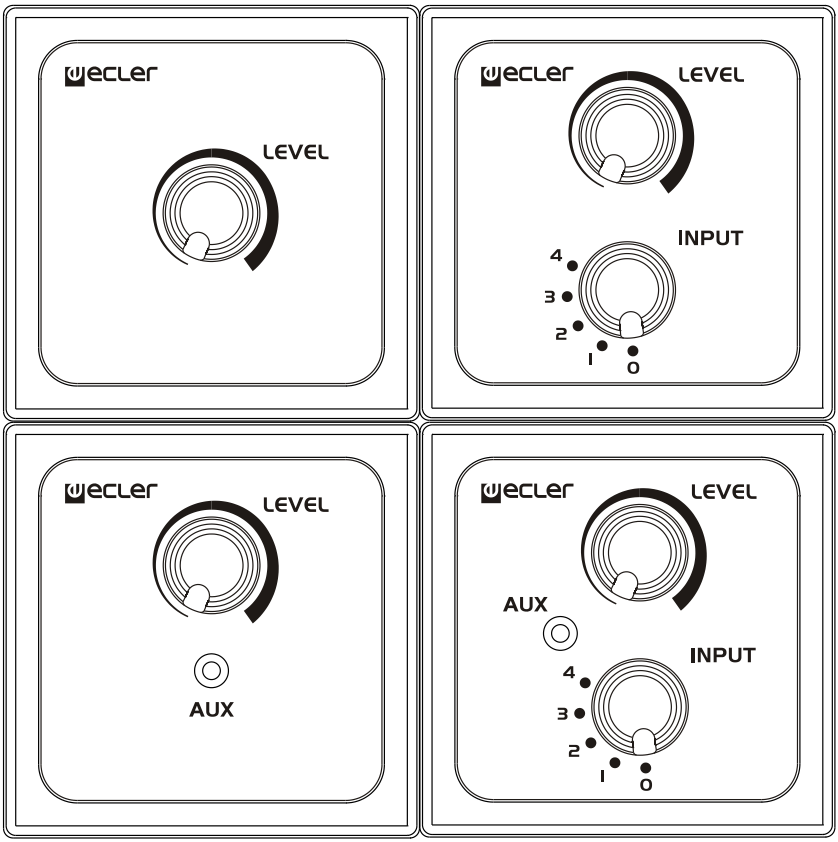

RJ-45 DIAGRAM			
Pin 1	White Orange	GND	
Pin 2	Orange	REMOTE VOL (10V÷0V → MIN÷MAX)	
Pin 3	White Green	GND	
Pin 4	Blue	N.C.	
Pin 5	White Blue	N.C.	
Pin 6	Green	VCC (+12V/+10V)	
Pin 7	White Brown	GND	
Pin 8	Brown	REMOTE ZONE (0, 3, 5, 7, 10V → OFF, Z1, Z2, Z3, Z4)	

TERMINAL BLOCK DIAGRAM (minijack)		
Pin 1	GROUND	
Pin 2	RING	
Pin 3	TIP	

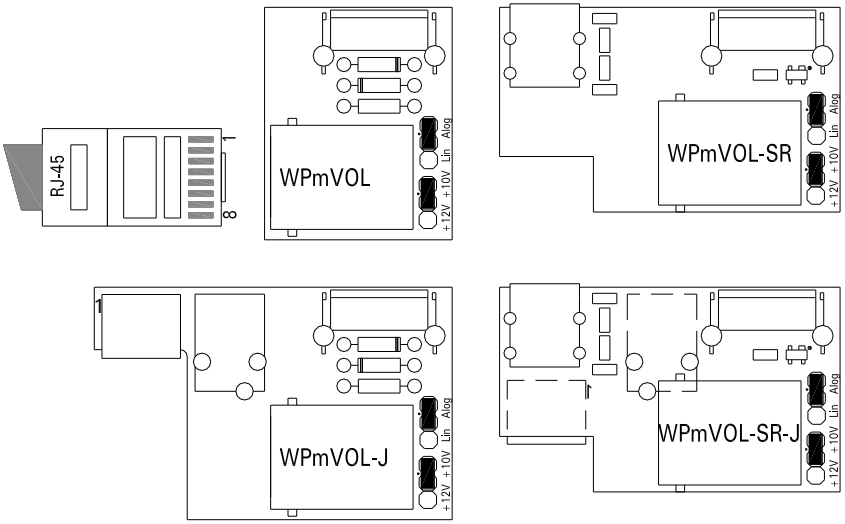

FACTORY DEFAULT: ALOG
+10V

ALOG for analog devices / LIN for digital devices
+12V for MIMO88 GPI´s / +10V for other REMOTE ports